


2.23E


MFC-MP

Screw-In Assembled Compact System with Valve Gate for best overall performance

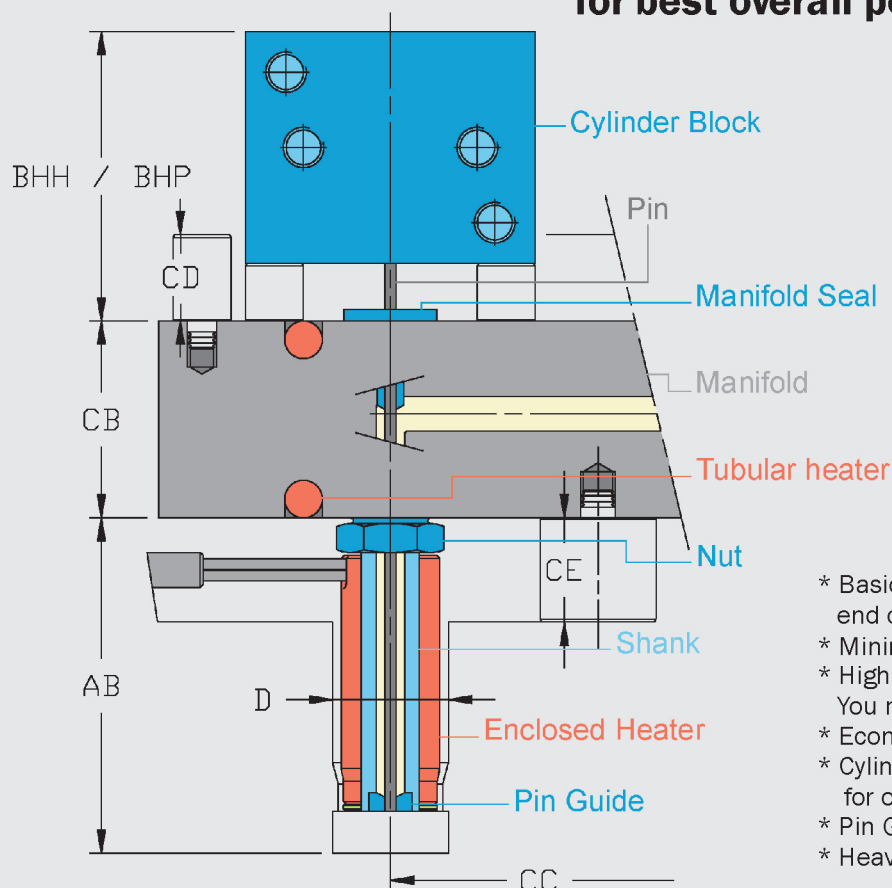

- * Basic shank for most types of screw in end caps and gates.
- * Minimum melt breakdown.
- * High conductive heater enclosure gives You more exact and even melt temperature
- * Economic and fast colour change
- * Cylinder Block with quick connections for oil/air and cooling water
- * Pin Guide for accurate and safe valve closing
- * Heavy duty and long life proof.

To select type of Valve Gate, see Catalog Section 1 "Bushing Guide" Build-in dimensions see on back page.



eweb MasterFlow is a new design quality system for moulding with hot runner technology. Our engineers have considered both old and new experiences when designing the system. For moulding sensitive components only verified solutions are chosen. With more than 20 years in hot runner business and thousands of hot runner systems delivered, we can guarantee best assistance from mold design to production optimizing. **eweb MasterFlow** is manufactured in Sweden by skilled workers and engineers. High quality, fast and competent service, satisfied

Series	Description		AB	BHH Hydraulic	BHP Pneumatic	øD	CB	CD	CE	CC	
	Manifold	Bushing								Min	Max
20	MFCM20-MP	MFC20 059	59	65	65	20	36	min 10 - max 20	min 8 - max 25	54	max 2 * AB
		MFC20 079	79								
		MFC20 099	99								
		MFC20 119	119								
		MFC20 139	139								
		MFC20 159	159								
30	MFCM30-MP	MFC30 059	59	65	65	30	44	min 10 - max 20	min 8 - max 25	60	max 2 * AB
		MFC30 079	79								
		MFC30 099	99								
		MFC30 119	119								
		MFC30 139	139								
		MFC30 159	159								
		MFC30 179	179								
		MFC30 199	199								
40	MFCM40-MP	MFC40 074	74	65	100	39	48	min 10 - max 20	min 8 - max 30	Hyd = 64 / Phe = 74	max 2 * AB
		MFC40 099	99								
		MFC40 124	124								
		MFC40 149	149								
		MFC40 174	174								
		MFC40 199	199								
		MFC40 224	224								
		MFC40 249	249								
50	MFCM50-MP	MFC50 089	89	100	Ej Tillgänglig	48	57	min 10 - max 20	min 8 - max 30	92	max 2 * AB
		MFC50 119	119								
		MFC50 149	149								
		MFC50 179	179								
		MFC50 209	209								
		MFC50 239	239								

Because of our program of continuous product improvements, EWEBE reserves the right to change specifications and design without notice and without incurring obligation.